


HIGH OUTPUT ALTERNATORS



SERIES 165 UPI – 24V | OE or secondary mount alternator

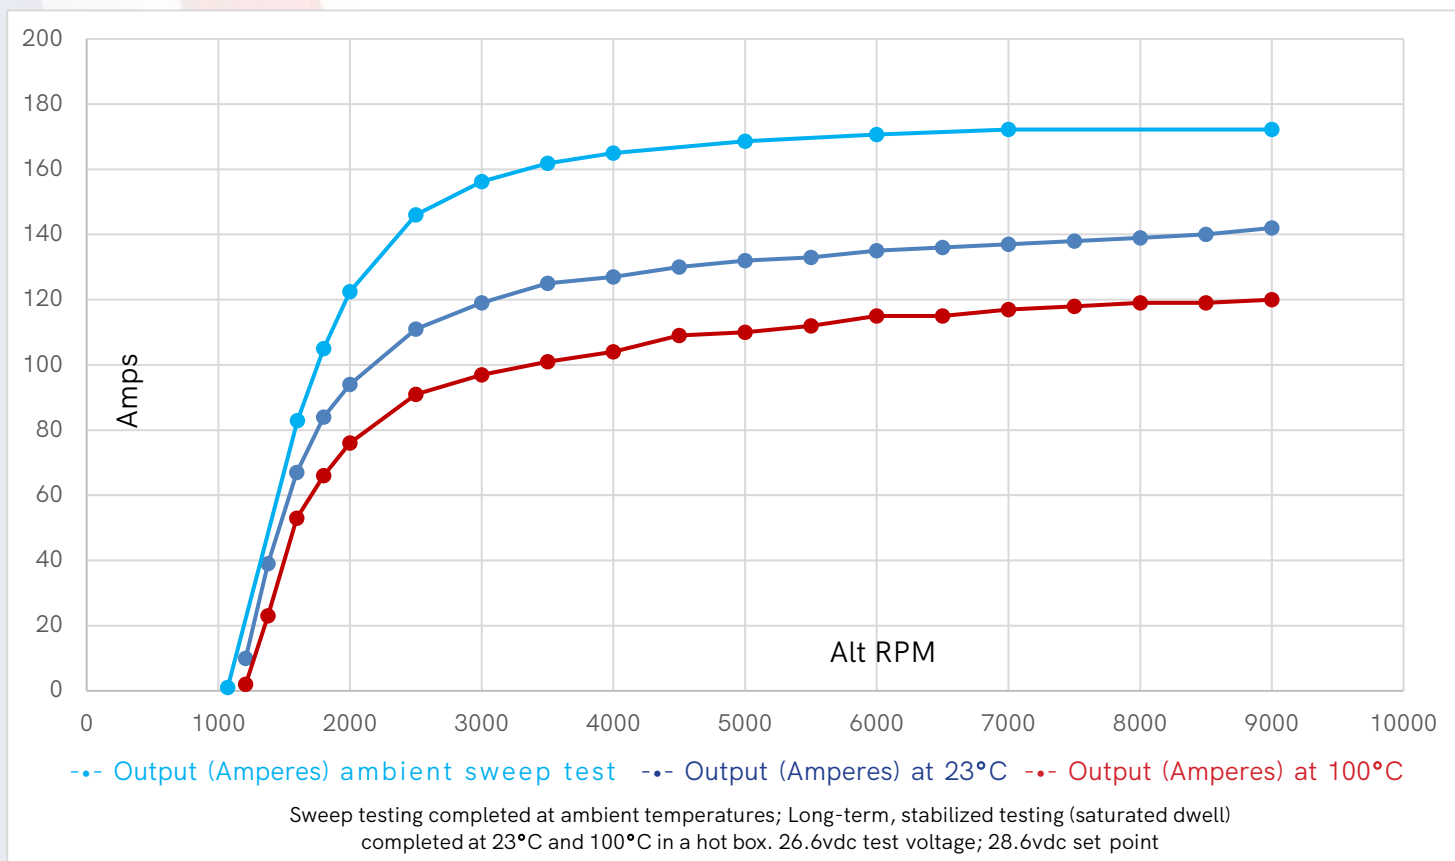

ELECTRICAL SPECIFICATIONS

Output Rating at 100°C	66/119 26.6V
Output at 1800 RPMs	66 amps
Output at 8500 RPMs	119 amps
Tested at Voltage	26.6V
Regulator Interface	External
Efficiency at 23°C	54% typical
Isolated Ground	NO/YES
Brushed/Brushless	Brushed

MECHANICAL SPECIFICATIONS

Mounting Types	OE/Tangent/GM/Saddle Pad/J180
Rotation	CW/CCW
Housing Material	Cast aluminum bare
Positive Connection	M8 X 1.25
Negative Connection	Case ground M8 X 1.25 (IG)
Shaft Diameter	17mm
Pulley	Per application
Weight	7.5kg typical



Photo for illustrative purposes only



© 2026 American Power Systems, Inc. ®

426 West Second Street | Davenport, Iowa 52801
+1 (563) 323-7994 | sales@americanpowerinc.com
www.americanpowerinc.com

Rev. 06/16/26